
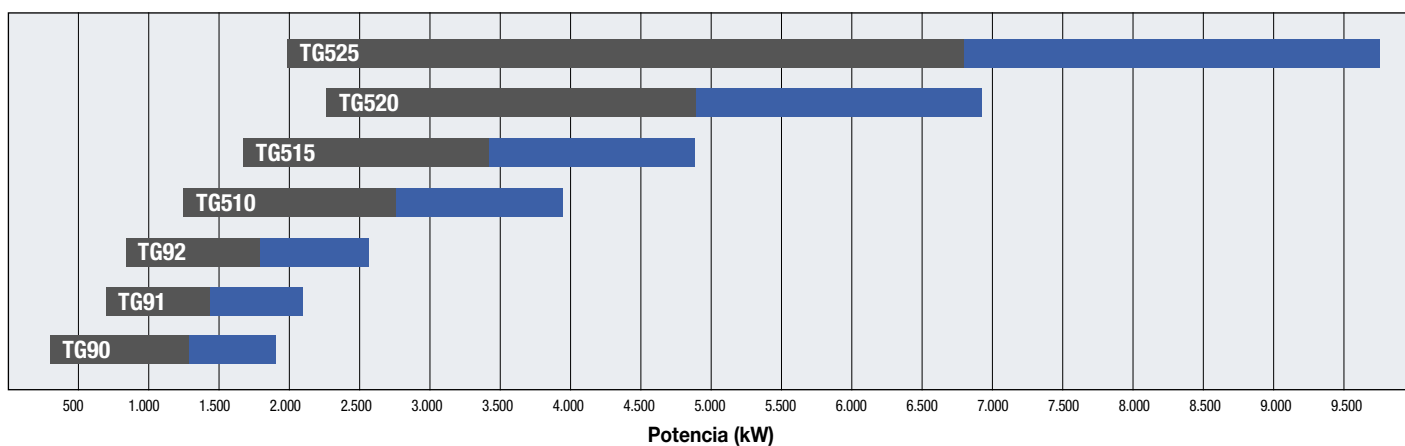
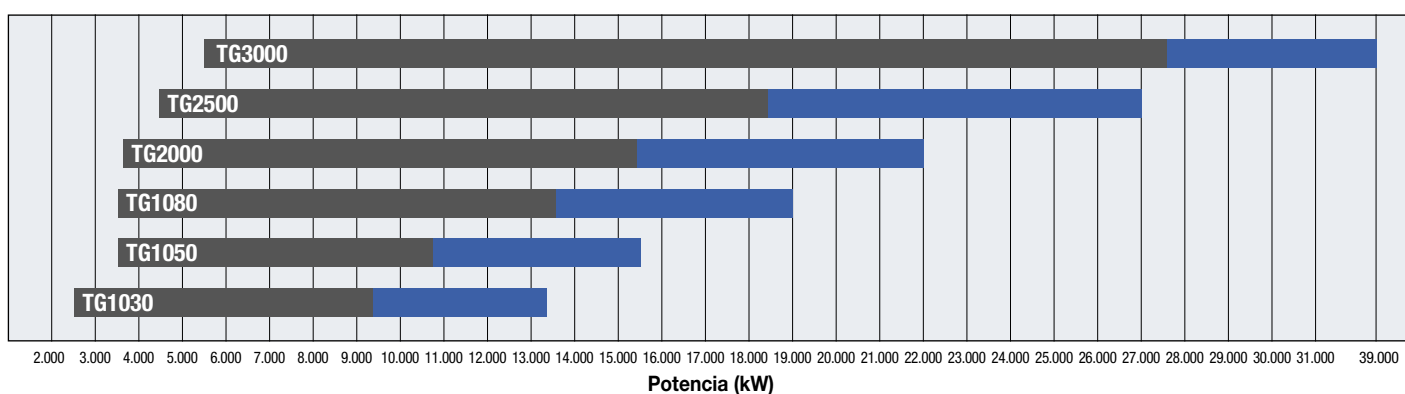
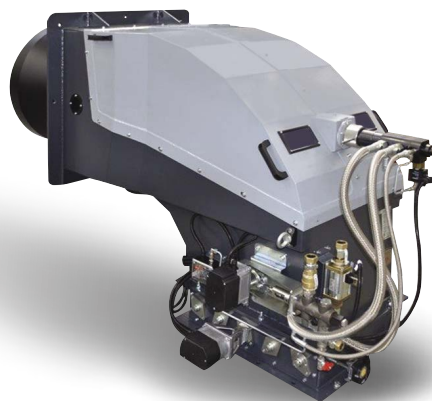


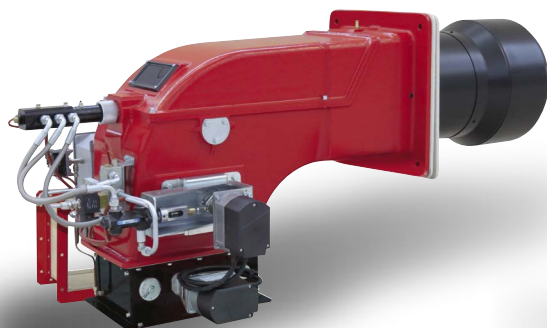

Tipo	Potencia mínima de modulación kW	Potencia mínima de aplicación kW	Potencia máxima kW
TG90	264	1.330	1.900
TG91	698	1.465	2.093
TG92	849	1.791	2.558
TG510	1.314	2.767	3.953
TG515	1.628	3.419	4.884
TG520	2.326	4.884	6.977
TG525	2.000	6.825	9.750
TG1030	2.500	9.310	13.300
TG1050	3.500	10.850	15.500
TG1080	3.500	13.300	19.000
TG2000	3.600	15.400	22.000
TG2500	4.500	18.400	27.000
TG3000	5.500	27.300	39.000

CARACTERÍSTICAS TÉCNICAS

Tipo	Modelo	Potencia kW		Motor de la bomba kW	Alimentación eléctrica monofásica auxiliares	Alimentación eléctrica trifásica motor
		min.	max.			
TG90	G-.xx.x.xx.G.xx	264	1.900	1,1	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG91	G-.xx.x.xx.G.xx	698	2.093	1,1	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG92	G-.xx.x.xx.G.xx	849	2.558	1,1	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG510	G-.xx.x.xx.G.xx	1.314	3.953	1,1	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG515	G-.xx.x.xx.G.xx	1.628	4.884	1,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG520	G-.xx.x.xx.G.xx	2.326	6.977	1,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG525	G-.xx.x.xx.G.xx	2.000	9.750	4,0	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG1030	G-.xx.x.xx.G.xx	2.500	13.300	5,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG1050	G-.xx.x.xx.G.xx	3.500	15.500	5,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG1080	G-.xx.x.xx.G.xx	3.500	19.000	5,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG2000	G-.xx.x.xx.G.xx	3.600	22.000	5,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG2500	G-.xx.x.xx.G.xx	4.500	27.000	5,5/7,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TG3000	G-.xx.x.xx.G.xx	5.500	39.000	5,5/7,5	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz