
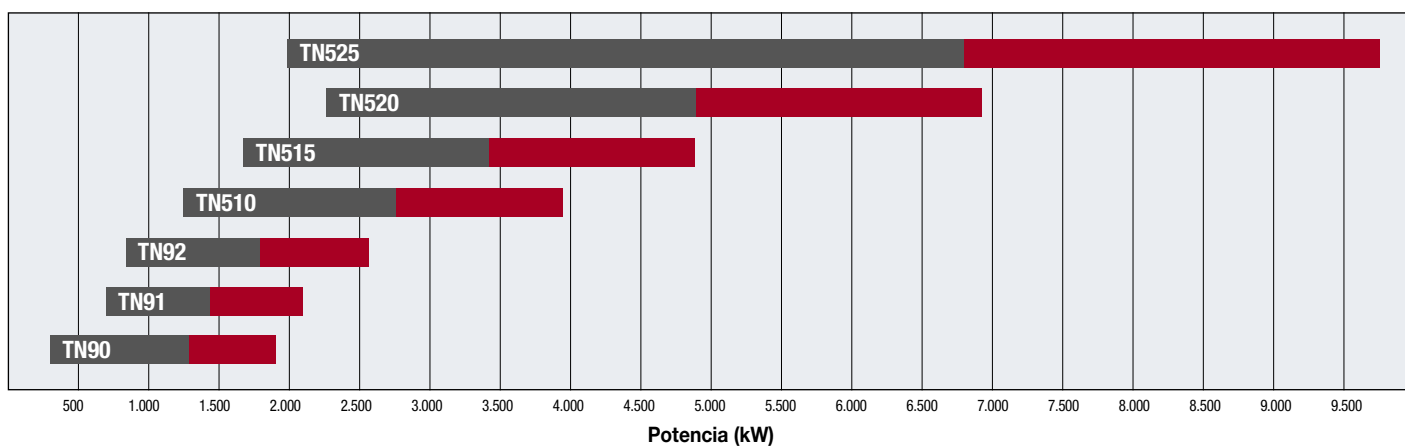
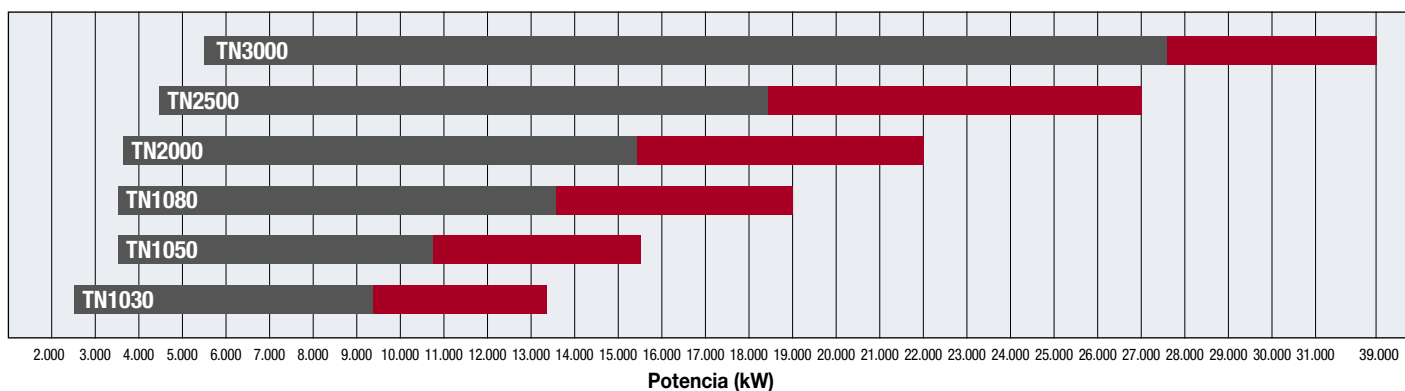
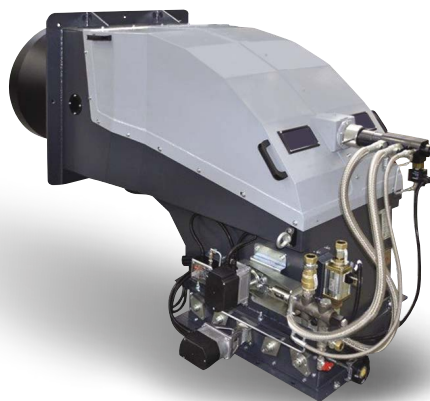


TIPO **TN** TN90 ... TN3000

Con viscosidad hasta 400 cSt a 50°C (50°E a 50°C) PULVERIZACION MECANICA

FUEL

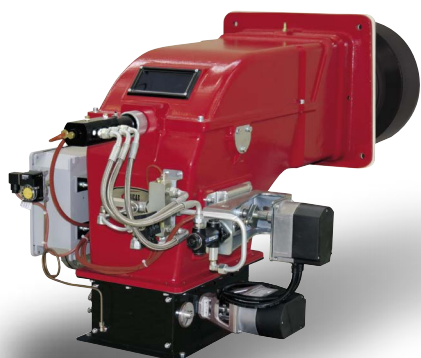

Tipo	Potencia mínima de modulación kW	Potencia mínima de aplicación kW	Potencia máxima kW
TN90	264	1.330	1.900
TN91	698	1.465	2.093
TN92	849	1.791	2.558
TN510	1.314	2.767	3.953
TN515	1.628	3.419	4.884
TN520	2.326	4.884	6.977
TN525	2.000	6.825	9.750
TN1030	2.500	9.310	13.300
TN1050	3.500	10.850	15.500
TN1080	3.500	13.300	19.000
TN2000	3.600	15.400	22.000
TN2500	4.500	18.400	27.000
TN3000	5.500	27.300	39.000

CARACTERÍSTICAS TÉCNICAS

Tipo	Modelo	Potencia kW		Motor de la bomba kW	Resistencias fuel kW	Alimentación eléctrica monofásica auxiliares	Alimentación eléctrica trifásica motor
		min.	max.				
TN90	D-.xx.S.xx.G.xx	264	1.900	1,1	12	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN91	D-.xx.S.xx.G.xx	698	2.093	1,1	18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN92	D-.xx.S.xx.G.xx	849	2.558	1,1	18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN510	D-.xx.S.xx.G.xx	1.314	3.953	1,1	24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN515	D-.xx.S.xx.G.xx	1.628	4.884	1,5	12 + 18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN520	D-.xx.S.xx.G.xx	2.326	6.977	2,2	18 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN525	D-.xx.S.xx.G.xx	2.000	9.750	4,0	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN1030	D-.xx.S.xx.G.xx	2.500	13.300	5,5	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN1050	D-.xx.S.xx.G.xx	3.500	15.500	5,5	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN1080	D-.xx.S.xx.G.xx	3.500	19.000	5,5	24 + 24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN2000	D-.xx.S.xx.G.xx	3.600	22.000	5,5	BAJO DEMANDA	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN2500	D-.xx.S.xx.G.xx	4.500	27.000	5,5/7,5	BAJO DEMANDA	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz
TN3000	D-.xx.S.xx.G.xx	5.500	39.000	5,5/7,5	BAJO DEMANDA	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz