

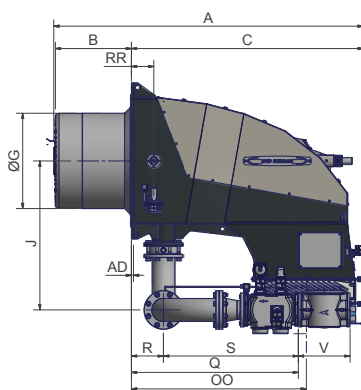
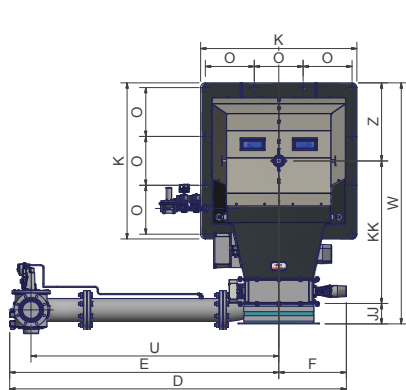




DIMENSIONS GLOBALES (HTLX... - HTLX...FGR)

Perçage de la chaudière
recommandé

Bride d'entrée d'air

Type	DN	Dimensiones globales (mm)																											
		A	B	C	CC	D	E	F	G	H	J	JJ	K	KK	L	M	N	O	OO	P	Q	R	RR	S	U	V	W	Y	Z
HTLX3050	150	2713	750	1951	-	1847	1374	414	698	850	775	160	850	882	1042	M16	1117	395	1289	790	1113	239	-	874	1196	481	1468	651	425
HTLX3050	200	2713	750	1951	-	-	-	414	698	850	775	160	850	882	1042	M16	1117	395	1289	790	-	239	-	-	-	-	1468	651	425