



DIMENSIONES TOTALES

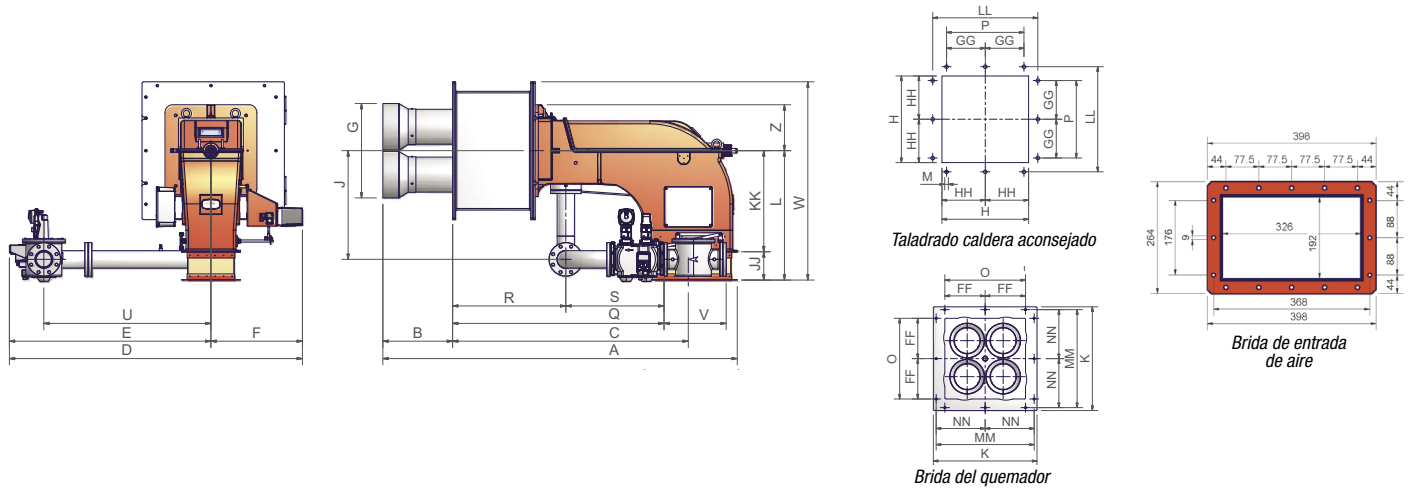

Tipo	DN	Dimensiones totales (mm)																												
		A	B	C	D	E	F	FF	G	GG	H	HH	J	JJ	K	KK	L	LL	M	MM	NN	O	P	Q	R	S	U	V	W	Z
KTPBY93	50	1361	304	1122	1342	852	490	255	386	255	442	221	449	185	550	510	695	510	M12	510	255	510	510	778	404	374	624	216	825	180
KTPBY93	65	1361	304	1122	1447	957	490	255	386	255	442	221	447	185	550	510	695	510	M12	510	255	510	510	887	404	403	750	293	840	180
KTPBY93	80	1361	304	1122	1449	959	490	255	386	255	442	221	447	185	550	510	695	510	M12	510	255	510	510	939	404	444	750	322	854	180
KTPBY93	100	1361	304	1122	1539	1049	490	255	386	255	442	221	447	185	550	510	695	510	M12	510	255	510	510	1046	404	524	824	382	867	180

131

KTPBY1030 KTPBY1080



Taladrado caldera aconsejado

Brida del quemador

Tipo	DN	Dimensiones totales (mm)																							
		B	C		CC	Dk	F	G	GG	H	HH	J	JJ	K	KK	LL	M	OO	P	R	S	U	V	W	Z
			min.	max.																					
KTPBY1030	80	435	1660	1961	348÷383	340	450÷670	560	275	600	300	710	175	750	665	700	16	1000	550	200	736	1092	322	1170	330
KTPBY1030	100	435	1660	1961	348÷383	340	450÷670	560	275	600	300	710	175	750	665	700	16	1000	550	200	642	1092	382	1170	330
KTPBY1030	125	435	1660	1961	348÷383	340	450÷670	560	275	600	300	710	175	750	665	700	16	1000	550	200	754	1192	480	1170	330
KTPBY1080	100	422	1860	2161	348÷383	540	450÷670	700	350	750	375	710	175	900	665	850	16	1000	700	200	642	1092	382	1170	330
KTPBY1080	125	422	1860	2161	348÷383	540	450÷670	700	350	750	375	710	175	900	665	850	16	1000	700	200	754	1192	480	1170	330