


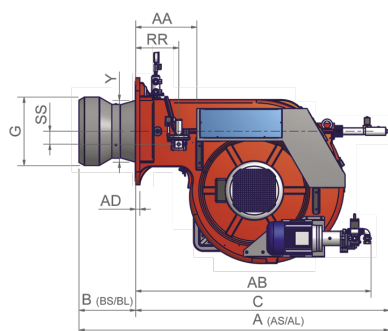


TECHNICAL DETAILS

Type	Model	Output kW		Auxiliary electrical power supply	Motor electrical power supply	Fan motor kW	Pump motor kW	Noise level dBA
		min.	max.					
RG1030	G-.xx.x.xx.A	2.550	10.600	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	22	4	85,6
RG1040	G-.xx.x.xx.A	2.550	13.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	30	5,5	85,6



Suggested boiler drilling



Burner flange

Type	Packaging dimensions (mm)			
	l	p	h	kg
RG1030/1040	2270	1720	1320	700

Approximate values

Type	Model	Overall dimensions (mm)																												
		A	A	AA	AB	AC	AD	AE	B	B	BB	C	CC	D	E	F	G	H	K	L	M	N	O	P	RR	SS	UU	W	Y	Z
		(AS)	(AL)						(BS)	(BL)																				
RG1030	G-.xx.x.xx.A	1914	2108	377	1452	651	25	585	350	544	657	1564	680	1502	680	822	422	472	660	816	M16	651	460	460	265	80	142	1146	379	330
RG1040	G-.xx.x.xx.A	1925	2119	377	1452	651	25	585	350	544	657	1575	680	1502	680	822	671	731 [•]	660	816	M16	651	460	460	265	80	142	1146	404	330

Approximate values

- Install a counter-flange between the burner and the boiler or in alternative, drill the H hole smaller but higher than the Y point and assemble the combustion head inside the boiler.