


TECHNICAL DETAILS

Type	Model	Output kW		Auxiliary electrical power supply	Motor electrical power supply	Fan motor	Pump motor	Gas connections	Noise level
		min.	max.			kW	kW	Rp	dBA
HR512A	MG.xx.S.xx.A.1.xxx	600	4.500	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	9,2	1,1	2" - DN65 - DN80 - DN100	81,7
HR515A	MG.xx.S.xx.A.1.xxx	770	5.200	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	11,0	1,5	2" - DN65 - DN80 - DN100	82,3
HR520A	MG.xx.S.xx.A.1.xxx	1.000	6.400	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	15,0	1,5	2" - DN65 - DN80 - DN100	83,2
HR525A	MG.xx.S.xx.A.1.xxx	2.000	8.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	18,5	3,0	DN65 - DN80 - DN100 A	84,9

For the configuration of the gas train, see page 112-113.

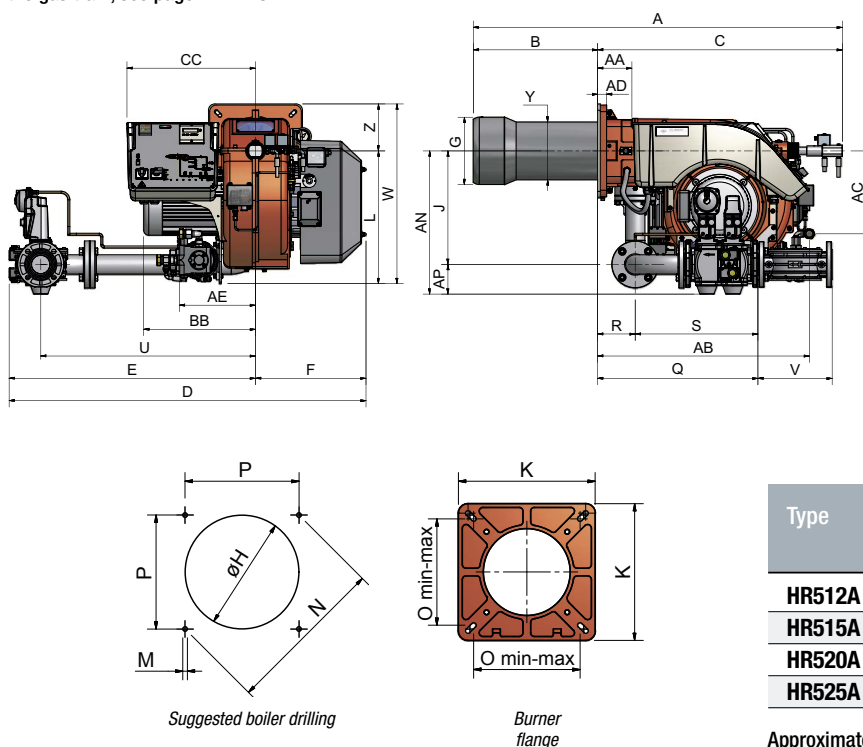

Type	Packaging dimensions (mm)			
	l	p	h	kg
HR512A	1.730	1.430	1.130	340
HR515A	1.730	1.430	1.130	360
HR520A	1.730	1.430	1.130	375
HR525A	1.800	1.500	1.300	400

Approximate values

Type	Model	Overall dimensions (mm)																														
		A	AA	AB	AC	AD	AE	AN	B	BB	C	CC	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S	U	V	W	Y	Z
HR512A	MG.xx.S.xx.A.1.50	1669	220	924	364	35	348	595	530	517	1139	532	1590	946	644	340	380	494	540	494	M14	552	390	390	763	149	614	845	190	830	328	270
HR512A	MG.xx.S.xx.A.1.65	1669	220	924	364	35	348	611	530	517	1139	532	1613	969	644	340	380	494	540	494	M14	552	390	390	636	149	487	845	292	830	328	270
HR512A	MG.xx.S.xx.A.1.80	1669	220	924	364	35	348	626	530	517	1139	532	1645	1002	644	340	380	494	540	494	M14	552	390	390	687	149	538	875	313	830	328	270
HR512A	MG.xx.S.xx.A.1.100	1669	220	924	364	35	348	639	530	517	1139	532	1726	1082	644	340	380	494	540	494	M14	552	390	390	791	149	642	942	353	830	328	270
HR515A	MG.xx.S.xx.A.1.50	1669	220	928	371	35	348	595	530	517	1139	532	1590	946	644	380	420	494	540	494	M14	552	390	390	763	149	614	845	190	830	328	270
HR515A	MG.xx.S.xx.A.1.65	1669	220	928	371	35	348	611	530	517	1139	532	1613	969	644	380	420	494	540	494	M14	552	390	390	636	149	487	845	292	830	328	270
HR515A	MG.xx.S.xx.A.1.80	1669	220	928	371	35	348	626	530	517	1139	532	1645	1002	644	380	420	494	540	494	M14	552	390	390	687	149	538	875	313	830	328	270
HR515A	MG.xx.S.xx.A.1.100	1669	220	928	371	35	348	639	530	517	1141	532	1726	1082	644	380	420	494	540	494	M14	552	390	390	791	149	642	942	353	830	328	270
HR520A	MG.xx.S.xx.A.1.50	1671	220	928	371	35	348	595	530	517	1141	532	1590	946	644	400	450	494	540	494	M14	552	390	390	763	149	614	845	190	830	328	270
HR520A	MG.xx.S.xx.A.1.65	1671	220	928	371	35	348	611	530	517	1141	532	1613	969	644	400	450	494	540	494	M14	552	390	390	636	149	487	845	292	830	328	270
HR520A	MG.xx.S.xx.A.1.80	1671	220	928	371	35	348	626	530	517	1141	532	1645	1002	644	400	450	494	540	494	M14	552	390	390	687	149	538	875	313	830	328	270
HR520A	MG.xx.S.xx.A.1.100	1671	220	928	371	35	348	639	530	517	1141	532	1726	1082	644	400	450	494	540	494	M14	552	390	390	791	149	642	942	353	830	328	270
HR525A	MG.xx.S.xx.A.1.65	1671	220	928	580	35	348	611	530	650	1141	650	1613	969	644	434	484	494	540	494	M14	552	390	390	636	149	487	845	292	874	328	270
HR525A	MG.xx.S.xx.A.1.80	1671	220	884	580	35	348	626	530	650	1141	650	1645	1002	644	434	484	494	540	494	M14	552	390	390	687	149	538	875	313	874	328	270
HR525A	MG.xx.S.xx.A.1.100	1671	220	884	580	35	348	639	530	650	1141	650	1726	1082	644	434	484	494	540	494	M14	552	390	390	792	149	642	942	353	874	328	270

Approximate values