


CARACTERÍSTICAS TÉCNICAS

Tipo	Modelo	Potencia kW		Alimentación eléctrica	Motor ventilator kW	Motor de la bomba kW	Resistencias fuel kW	Rampa gas
		min.	max.					
KP60	MN.xx.S.xx.A.0.xx	160	880	230/400 V 3N ac	1,1	0,55	4,5	1"¼ - 1"½ - 2" - DN65
KP72	MN.xx.S.xx.A.0.xx	330	1.200	230/400 V 3N ac	2,2	0,55	8,0	1"½ - 2" - DN65 - 80
KP72	MN.xx.S.xx.A.1.xx	330	1.550	230/400 V 3N ac	2,2	0,55	8,0	2" - DN65 - 80
KP73	MN.xx.S.xx.A.1.xx	300	2.100	230/400 V 3N ac	3,0	1,10	12,0	2" - DN65 - 80


Para la configuración de la rampa gas véase pág. 101.

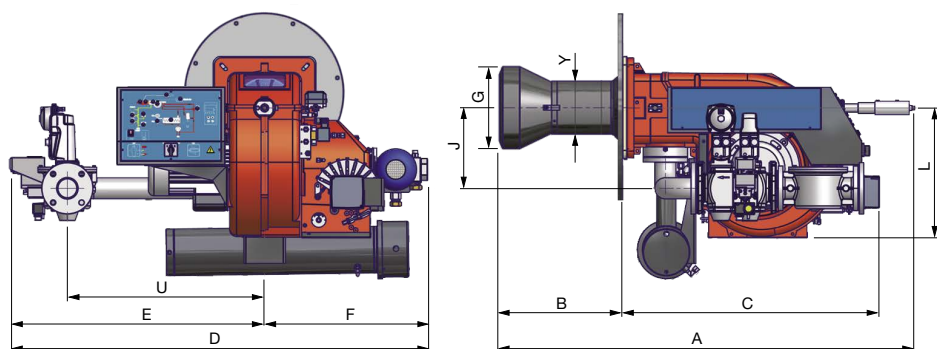


Tipo	Dimensiones de embalaje (mm)			
	l	p	h	kg
KP60	1730	1280	1020	176
KP72	1730	1280	1020	280
KP73	1730	1280	1020	280

Valores indicativos

KP60




KP72 - KP73



KP60 - KP72 - KP73

Instalación con contrabrida



Tipo	Modelo	Dimensiones totales (mm)											Taladrado caldera (mm)							Brida del quemador (mm)			Contrabrida (mm)		
		A	B*	C	D	E	F	G	J	L	U	Y	H•	H1	M	M1	N	P	P1	K	O		O1	PP	QQ
																					min.	max.			
KP60	MN.xx.S.xx.A.0.xx	1116	376	740	1205	685	520	250	250	520	540	190	280	280	M10	M12	269	190	480	240	190	190	190	440	480
KP72	MN.xx.S.xx.A.0.xx	1325	505	820	1365	825	540	300	265	580	560	212	340	340	M10	M12	330	233	480	300	216	250	233	440	480
KP73	MN.xx.S.xx.A.0.xx	1289	469	820	1365	825	540	320	265	580	560	212	340	340	M10	M12	330	233	480	300	216	250	233	440	480

Valores indicativos

* El tamaño B se reduce en 20 mm con la contrabrida y la junta.

• Montar entre el quemador y la caldera una contrabrida. Como alternativa, hacer más pequeño el orificio H pero superior a la cota Y y montar la tobera por el interior de la caldera.