


CARACTÉRISTIQUES TECHNIQUES

Type	Modèle	Puissance kW		Alimentation électrique	Moteur ventilateur kW	Raccordements gaz
		min.	max.			
NG280	M-.TN.x.xx.A.0.xx	95	300	230 V 1N ac	0,25	1" - 1"¼ - 1"½
NG280	M-.xx.x.xx.A.0.xx	65	300	230 V 1N ac	0,25	1" - 1"¼ - 1"½
NG350	M-.TN.M.xx.A.0.xx	115	330	230 V 1N ac	0,37	1" - 1"¼ - 1"½
NG350	M-.xx.M.xx.A.0.xx	80	330	230 V 1N ac	0,37	1" - 1"¼ - 1"½
NG400	M-.TN.M.xx.A.0.xx	185	420	230 V 1N ac	0,37	1" - 1"¼ - 1"½ - 2"
NG400	M-.xx.M.xx.A.0.xx	115	420	230 V 1N ac	0,37	1" - 1"¼ - 1"½ - 2"
NG550	M-.TN.x.xx.A.0.xx	245	570	230 V 1N ac	0,62	1"¼ - 1"½ - 2"
NG550	M-.xx.x.xx.A.0.xx	160	570	230 V 1N ac	0,62	1"¼ - 1"½ - 2"

Pour la configuration des rampes de gaz, voir page 101.

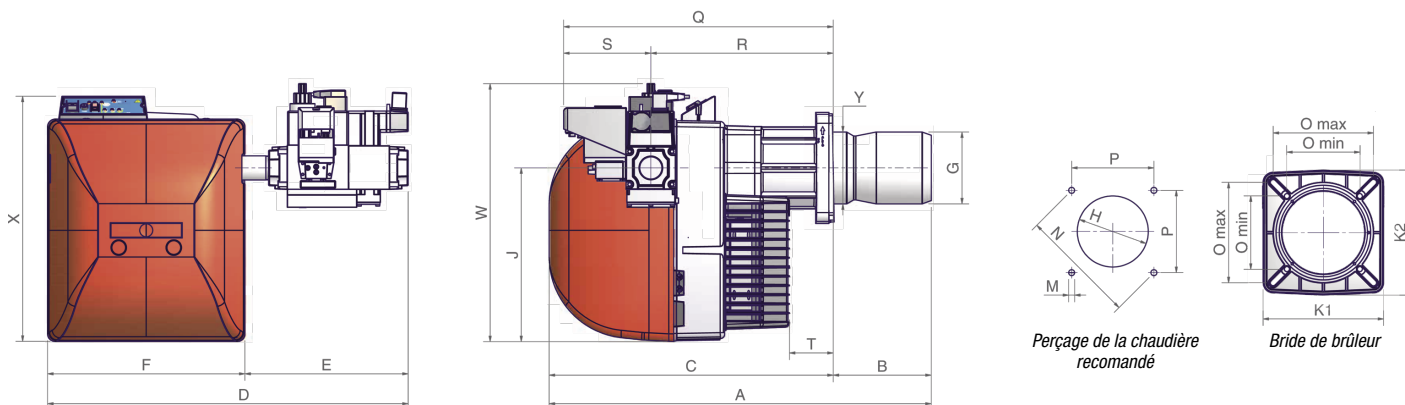

Type	Dimensions de l'emballage (mm)			
	l	p	h	kg
NG280/350/400	1120	440	580	42
NG550	1200	460	630	55

Valeurs indicatives

Type	Modèle	Dimensions globales (mm)																								
		A		B		C	D	E	F	G	H	J	K		M	N	O		P	Q	R	S	T	W	X	Y
		stand.	lungo	stand.	lungo								1	2			min.	max.								
NG280	M-.TN.x.xx.A.0.25/32	733	878	163	308	570	596	200	396	117	137	348	215	223	M10	219	131	179	155	541	366	175	128	508	491	108
NG280	M-.xx.x.xx.A.0.40	733	878	163	308	570	726	330	396	117	137	348	215	223	M10	219	131	179	155	541	366	175	128	517	491	108
NG350	M-.xx.M.xx.A.0.25/32	748	878	178	308	570	596	200	396	125	164	348	215	223	M10	219	131	179	155	541	366	175	89	508	491	144
NG350	M-.xx.M.xx.A.0.40	748	878	178	308	570	726	330	396	125	164	348	215	223	M10	219	131	179	155	541	366	175	89	517	491	144
NG400	M-.xx.M.xx.A.0.25/32	768	898	198	328	570	596	200	396	144	164	348	215	223	M10	219	131	179	155	541	366	175	89	508	491	144
NG400	M-.xx.M.xx.A.0.40	768	898	198	328	570	726	330	396	144	164	348	215	223	M10	219	131	179	155	541	366	175	89	517	491	144
NG400	M-.xx.M.xx.A.0.50	768	898	198	328	570	726	330	396	144	164	348	215	223	M10	219	131	179	155	541	366	175	89	567	491	144
NG550	M-.xx.x.xx.A.0.32	843	943	253	353	590	671	245	426	158	178	384	241	241	M10	247	157	192	174	552	377	175	69	543	533	155
NG550	M-.xx.x.xx.A.0.40	843	943	253	353	590	744	318	426	158	178	384	241	241	M10	247	157	192	174	552	377	175	69	553	533	155
NG550	M-.xx.x.xx.A.0.50	843	943	253	353	590	744	318	426	158	178	384	241	241	M10	247	157	192	174	552	377	175	69	603	533	155

Valeurs indicatives