


CARACTÉRISTIQUES TECHNIQUES

Type	Modèle	Puissance kW		Alimentation électrique	Moteur ventilateur kW	Raccordements gaz
		min.	max.			
P61	M-xx.x.xx.A.0.xx	160	800	230/400 V 3N ac	1,1	1"¼ - 1"½ - 2" - DN65
P65	M-xx.x.xx.A.0.xx	270	970	230/400 V 3N ac	1,5	1"½ - 2" - DN65
P71	M-xx.x.xx.A.0.xx	300	1.200	230/400 V 3N ac	2,2	1"½ - 2" - DN65 - DN80
P71	M-xx.x.xx.A.1.xx	300	1.650	230/400 V 3N ac	2,2	1"½ - 2" - DN65 - DN80


Pour la configuration des rampes de gaz, voir page 101.

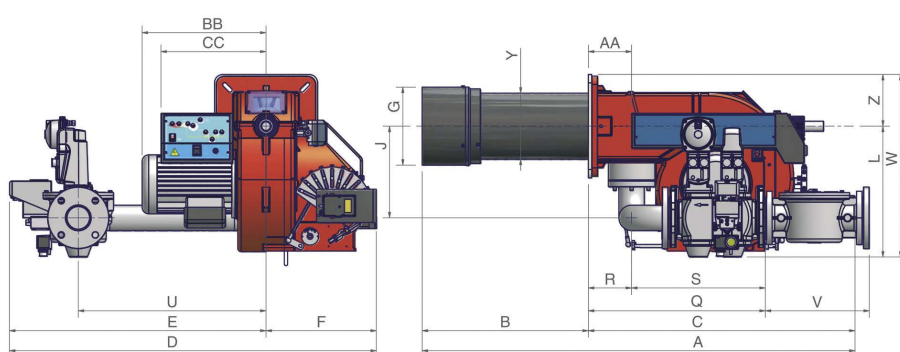


Type	Dimensions de l'emballage (mm)			
	l	p	h	kg
P61*	1200	670	540	60
P65*	1280	850	760	100
P71*	1280	850	760	120

* Valeurs indicatives (rapporté au modèle avec raccords gaz DN65)

P61

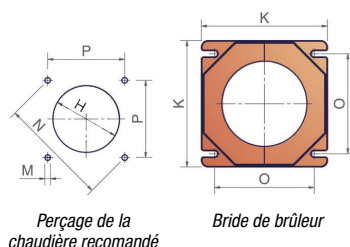

P65 - P71

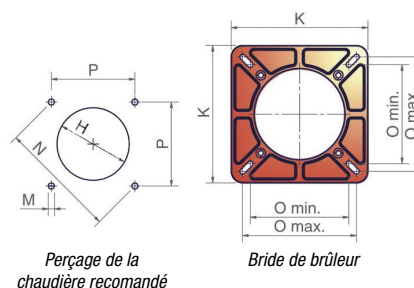

Type	Modèle	Dimensions globales (mm)																						
		AS	AL	AA	B(S*)	B(L*)	BB	C	CC	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S
																				min.	max.			
P61	M-xx.x.xx.A.0.32	1079	1169	99	343	433	314	736	298	812	500	312	184	204	210	240	344	M10	269	190	190	190	341	112
P61	M-xx.x.xx.A.0.40	1079	1169	99	343	433	314	736	298	812	500	312	184	204	210	240	344	M10	269	190	190	190	439	112
P61	M-xx.x.xx.A.0.50	1079	1169	99	343	433	314	736	298	812	500	312	184	204	210	240	344	M10	269	190	190	190	447	112
P61	M-xx.x.xx.A.0.65	1079	1169	99	343	433	314	736	298	997	685	312	184	204	250	240	420	M10	269	190	190	190	515	112
P65	M-xx.x.xx.A.0.40	1129	1219	130	326	416	373	803	316	900	568	332	184	218	208	300	376	M10	330	216	250	233	457	130
P65	M-xx.x.xx.A.0.50	1129	1219	130	326	416	373	803	316	900	568	332	184	218	208	300	376	M10	330	216	250	233	465	130
P65	M-xx.x.xx.A.0.65	1129	1219	130	326	416	373	803	316	998	666	332	184	218	275	300	393	M10	330	216	250	233	533	130
P71	M-xx.x.xx.A.1.40	1188	1298	130	385	495	373	803	316	1026	694	332	234	264	208	300	376	M10	330	216	250	233	457	130
P71	M-xx.x.xx.A.1.50	1188	1298	130	385	495	373	803	316	1026	694	332	234	264	208	300	376	M10	330	216	250	233	465	130
P71	M-xx.x.xx.A.1.65	1188	1298	130	385	495	373	803	316	1104	772	332	234	264	275	300	393	M10	330	216	250	233	533	130
P71	M-xx.x.xx.A.1.80	1188	1298	130	385	495	373	803	316	1106	774	332	234	264	275	300	407	M10	330	216	250	233	574	130

Valeurs indicatives