


CARACTÉRISTIQUES TECHNIQUES

Type	Modèle	Puissance kW		Alimentation électrique	Moteur ventilateur kW	Raccordements gaz
		min.	max.			
NGX280	M-.TN.x.xx.A.0.xx	93	190	230 V 1N ac	0,25	1" - 1"¼ - 1"½
NGX280	M-.xx.x.xx.A.0.xx	60	190	230 V 1N ac	0,25	1" - 1"¼ - 1"½
NGX350	M-.xx.x.xx.A.0.xx	65	260	230 V 1N ac	0,37	1" - 1"¼ - 1"½
NGX400	M-.xx.x.xx.A.0.xx	90	350	230 V 1N ac	0,37	1" - 1"¼ - 1"½ - 2"
NGX550	M-.xx.x.xx.A.0.xx	132	490	230 V 1N ac	0,62	1"¼ - 1"½ - 2"

Pour la configuration des rampes de gaz, voir page 101.

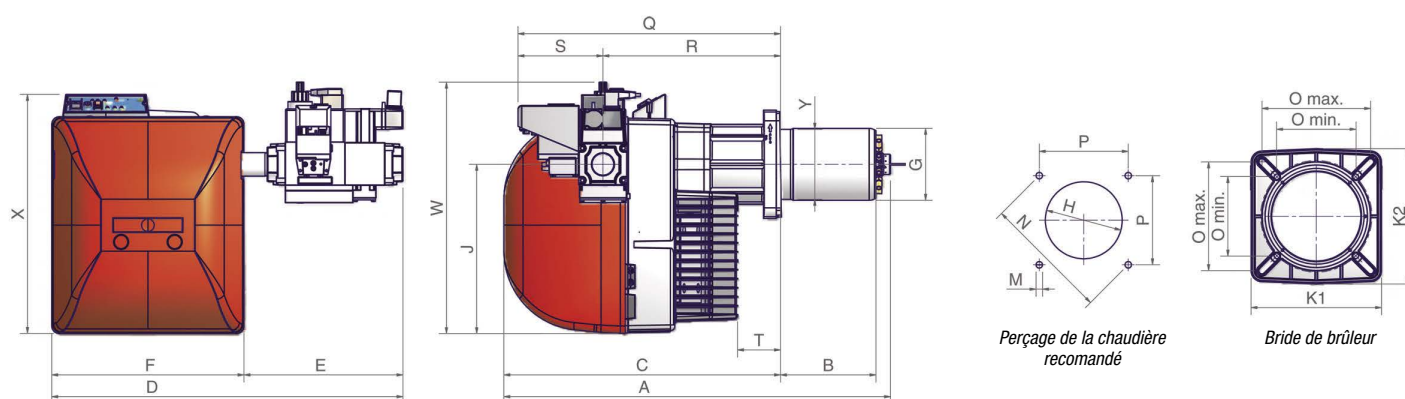

Type	Dimensions de l'emballage (mm)			
	l	p	h	kg
NGX280/350/400	1120	440	580	42
NGX550	1200	460	630	55

Valeurs indicatives

Type	Modèle	Dimensions globales (mm)																								
		AS	AL	BS	BL	C	D	E	F	G	H	J	K		M	N	O		P	Q	R	S	T	W	X	Y
													1	2			min.	max.								
NGX280	M-.xx.x.xx.A.0.25/32	754	899	163	308	570	596	200	396	113	164	348	215	223	M10	219	131	179	155	541	366	175	128	508	491	144
NGX280	M-.xx.x.xx.A.0.40	754	899	163	308	570	726	330	396	113	164	348	215	223	M10	219	131	179	155	541	366	175	128	517	491	144
NGX350	M-.xx.x.xx.A.0.25/32	778	908	178	308	570	596	200	396	131	164	348	215	223	M10	219	131	179	155	541	366	175	89	508	491	144
NGX350	M-.xx.x.xx.A.0.40	778	908	178	308	570	726	330	396	131	164	348	215	223	M10	219	131	179	155	541	366	175	89	517	491	144
NGX400	M-.xx.x.xx.A.0.25/32	798	928	198	328	570	596	200	396	148	168	348	215	223	M10	219	131	179	155	541	366	175	89	508	491	144
NGX400	M-.xx.x.xx.A.0.40	798	928	198	328	570	726	330	396	148	168	348	215	223	M10	219	131	179	155	541	366	175	89	517	491	144
NGX400	M-.xx.x.xx.A.0.50	798	928	198	328	570	726	330	396	148	168	348	215	223	M10	219	131	179	155	541	366	175	89	567	491	144
NGX550	M-.xx.x.xx.A.0.32	874	974	253	353	590	671	245	426	168	198	384	241	241	M10	247	157	192	174	552	377	175	69	543	533	155
NGX550	M-.xx.x.xx.A.0.40	874	974	253	353	590	744	318	426	168	198	384	241	241	M10	247	157	192	174	552	377	175	69	553	533	155
NGX550	M-.xx.x.xx.A.0.50	874	974	253	353	590	744	318	426	168	198	384	241	241	M10	247	157	192	174	552	377	175	69	603	533	155

Valeurs indicatives