


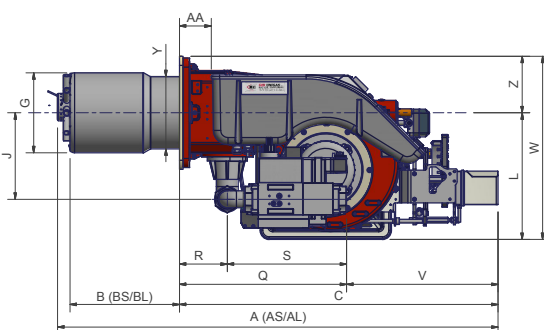



CARACTÉRISTIQUES TECHNIQUES

Type	Modèle	Puissance kW		Alimentation électrique	Moteur ventilateur kW	Raccordements gaz	Niveau d'émission sonore dBA
		min.	max.				
C83X	M-.xx.xR.xx.A.0.xx	200	830	230/400 V 3N ac	1,1	1"¼ - 1"½ - 2" - DN65	< 75
E115X	M-.xx.xR.xx.A.0.xx	300	1.150	230/400 V 3N ac	2,2	1"½ - 2" - DN65 - DN80	< 75
E150X	M-.xx.xR.xx.A.1.xx	250	1.550	230/400 V 3N ac	2,2	1"½ - 2" - DN65 - DN80	< 75
E180X	M-.xx.xR.xx.A.1.xx	320	1.800	230/400 V 3N ac	3,0	1"½ - 2" - DN65 - DN80	< 75

Pour la configuration des rampes de gaz, voir page 101.



Perçage de la chaudière
recomandé



Bride de brûleur

Type	Dimensions de l'emballage (mm)			
	l	p	h	kg
C83X	1345	835	750	60
E115X	1465	815	800	115
E150X	1465	815	800	125
E180X*	1465	815	800	125

Valeurs indicatives

* Valeurs indicatives (rapporté au modèle avec raccords gaz DN80)

Type	Modèle	Dimensions globales (mm)																													
		AA	AS	AL	BB	BS	BL	C	CC	D	E	F	G	H	I	J	K	L	M	N	O		P	Q	R	S	U	V	W	Y	Z
																						min.	max.								
C83X	M-.xx.xR.xx.A.0.32	87	1207	1335	328	300	450	873	342	978	634	344	219	249	198	233	300	347	M10	330	216	250	233	387	131	256	540	-	502	198	155
C83X	M-.xx.xR.xx.A.0.40	87	1207	1335	328	300	450	873	342	978	634	344	219	249	198	233	300	347	M10	330	216	250	233	461	131	330	540	-	502	198	155
C83X	M-.xx.xR.xx.A.0.50	87	1207	1335	328	300	450	873	342	978	634	344	219	249	198	233	300	347	M10	330	216	250	233	471	131	340	525	-	502	198	155
C83X	M-.xx.xR.xx.A.0.65	87	1207	1335	328	300	450	873	342	1064	720	344	219	249	198	233	300	347	M10	330	216	250	233	571	131	440	593	292	502	198	155
E115X	M-.xx.xR.xx.A.0.40	69	1267	1352	372	305	390	928	352	953	591	362	219	249	210	233	300	453	M10	330	216	250	233	457	130	327	541	-	608	210	155
E115X	M-.xx.xR.xx.A.0.50	69	1267	1352	372	305	390	928	352	888	526	362	219	249	210	233	300	453	M10	330	216	250	233	472	130	342	526	-	608	210	155
E115X	M-.xx.xR.xx.A.0.65	69	1267	1352	372	305	390	928	352	1080	718	362	219	249	210	233	300	453	M10	330	216	250	233	562	130	432	593	292	608	210	155
E115X	M-.xx.xR.xx.A.0.80	69	1267	1352	372	305	390	928	352	1054	692	362	219	249	210	233	300	453	M10	330	216	250	233	558	130	428	565	310	608	210	155
E150X	M-.xx.xR.xx.A.1.40	69	1362	1428	372	400	500	928	352	1078	716	362	259	280	210	233	300	453	M10	330	216	250	233	457	130	327	541	-	608	210	155
E150X	M-.xx.xR.xx.A.1.50	69	1362	1428	372	400	500	928	352	1013	651	362	259	280	210	233	300	453	M10	330	216	250	233	472	130	342	526	-	608	210	155
E150X	M-.xx.xR.xx.A.1.65	69	1362	1428	372	400	500	928	352	1162	800	362	259	280	210	233	300	453	M10	330	216	250	233	562	130	432	593	292	608	210	155
E150X	M-.xx.xR.xx.A.1.80	69	1362	1428	372	400	500	928	352	1136	774	362	259	280	210	233	300	453	M10	330	216	250	233	562	130	432	565	310	608	210	155
E180X	M-.xx.xR.xx.A.1.40	69	1362	1462	403	400	500	928	352	1078	716	362	259	280	210	235	300	453	M10	330	216	250	233	457	130	327	541	-	608	210	155
E180X	M-.xx.xR.xx.A.1.50	69	1362	1462	403	400	500	928	352	1013	651	362	259	280	210	235	300	453	M10	330	216	250	233	472	130	342	526	-	608	210	155
E180X	M-.xx.xR.xx.A.1.65	69	1362	1462	403	400	500	928	352	1162	800	362	259	280	210	235	300	453	M10	330	216	250	233	562	130	432	593	292	608	210	155
E180X	M-.xx.xR.xx.A.1.80	69	1362	1462	403	400	500	928	352	1136	774	362	259	280	210	235	300	453	M10	330	216	250	233	558	130	428	565	310	608	210	155

Valeurs indicatives