




TIPO TP TP120A ... TP3000

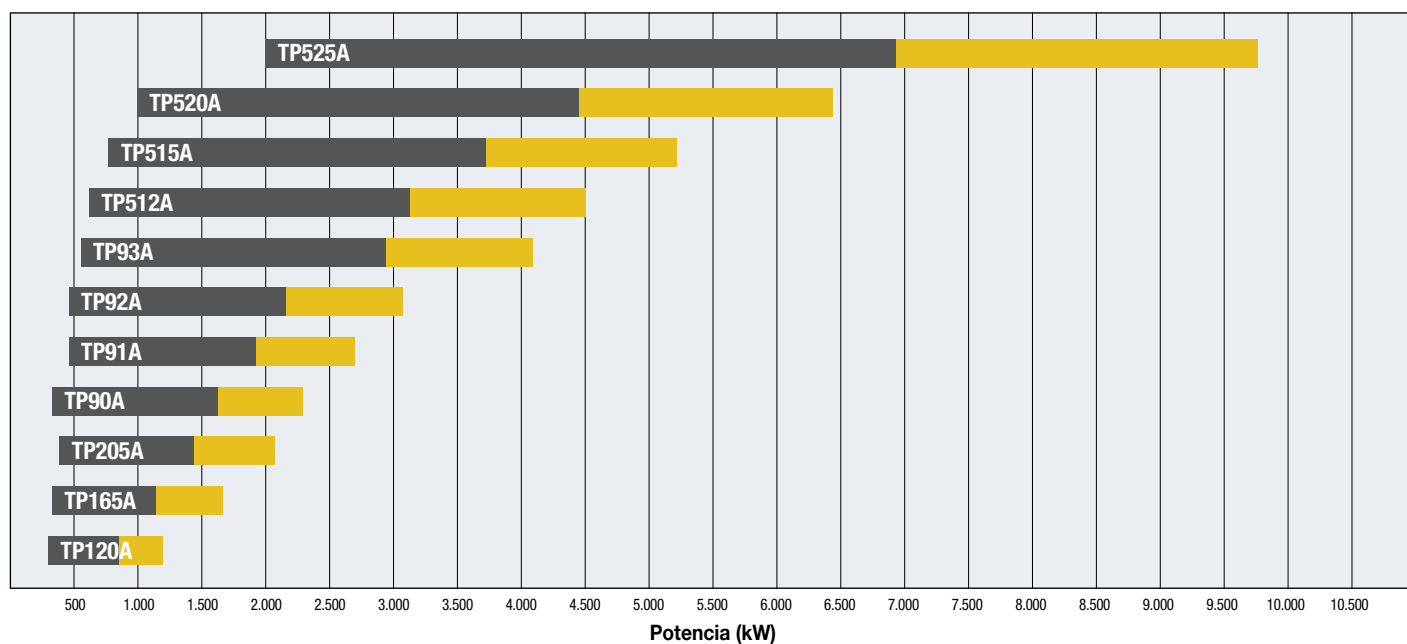

GAS

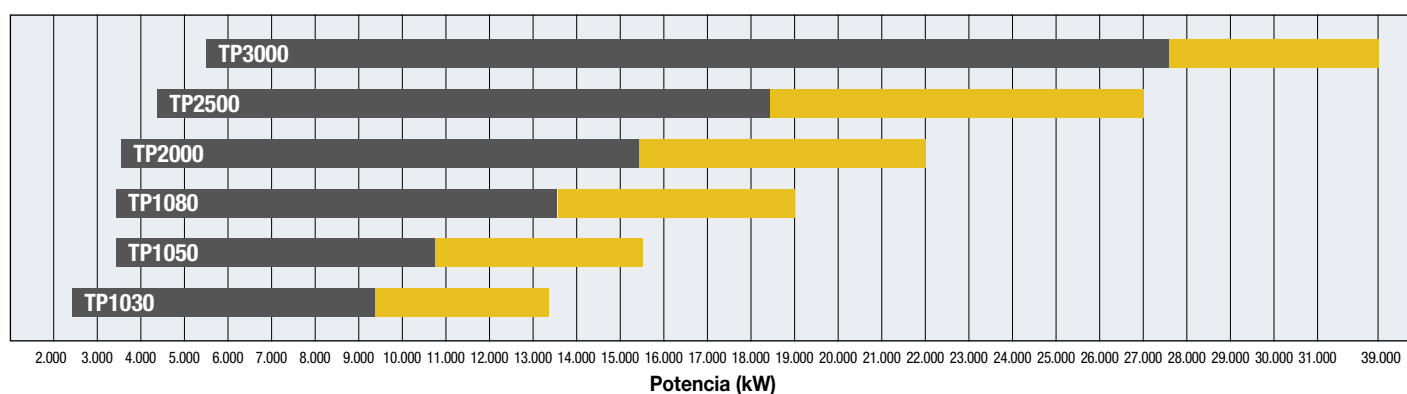


Tipo	Potencia mínima de modulación kW	Potencia mínima de aplicación kW	Potencia máxima kW
TP120A	300	840	1.200
TP165A	320	1.154	1.650
TP205A	340	1.433	2.050
TP90A	320	1.610	2.300
TP91A	480	1.869	2.670
TP92A	480	2.135	3.050
TP93A	550	2.870	4.100
TP512A	600	3.150	4.500
TP515A	770	3.640	5.200
TP520A	1.000	4.480	6.400
TP525A	2.000	6.825	9.750
TP1030	2.500	9.310	13.300
TP1050	3.500	10.850	15.500
TP1080	3.500	13.300	19.000
TP2000	3.600	15.400	22.000
TP2500	4.500	18.400	27.000
TP3000	5.500	27.300	39.000


CARACTERÍSTICAS TÉCNICAS

Tipo	Modelo	Potencia kW		Alimentación eléctrica monofásica auxiliares	Alimentación eléctrica trifásica motor	Rampa gas
		min.	max.			Rp
TP120A	M-.xx.S.xx.x.x.xxx.xx	300	1.200	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	1"¼ - 1"½ - 2" - DN65 - DN80
TP165A	M-.xx.S.xx.x.x.xxx.xx	320	1.650	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	1"¼ - 1"½ - 2" - DN65 - DN80
TP205A	M-.xx.S.xx.x.x.xxx.xx	340	2.050	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	1"¼ - 1"½ - 2" - DN65 - DN80
TP90A	M-.xx.S.xx.x.x.xxx.xx	320	2.300	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP91A	M-.xx.S.xx.x.x.xxx.xx	480	2.670	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP92A	M-.xx.S.xx.x.x.xxx.xx	480	3.050	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP93A	M-.xx.S.xx.x.x.xxx.xx	550	4.100	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP512A	M-.xx.S.xx.x.x.xxx.xx	600	4.500	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP515A	M-.xx.S.xx.x.x.xxx.xx	770	5.200	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP520A	M-.xx.S.xx.x.x.xxx.xx	1.000	6.400	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100
TP525A	M-.xx.S.xx.x.x.xxx.xx	2.000	9.750	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN65 - DN80 - DN100
TP1030	M-.xx.S.xx.x.x.xxx.xx	2.500	13.300	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN80 - DN100 - DN125
TP1050	M-.xx.S.xx.x.x.xxx.xx	3.500	15.500	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN100 - DN125
TP1080	M-.xx.S.xx.x.x.xxx.xx	3.500	19.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN100 - DN125
TP2000	M-.xx.S.xx.x.x.xxx.xx	3.600	22.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN125 - DN150
TP2500	M-.xx.S.xx.x.x.xxx.xx	4.500	27.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN125 - DN150
TP3000	M-.xx.S.xx.x.x.xxx.xx	5.500	39.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN125 - DN150 - DN200


TP120A PR-MD

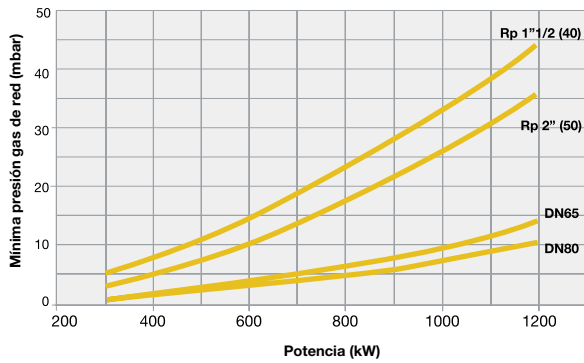


TP165A PR-MD

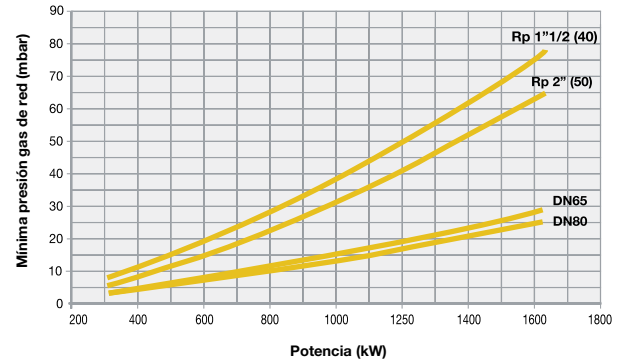


TP205A PR-MD

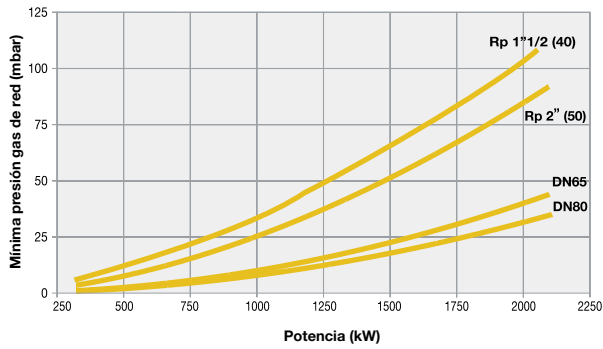





TP90A PR-MD

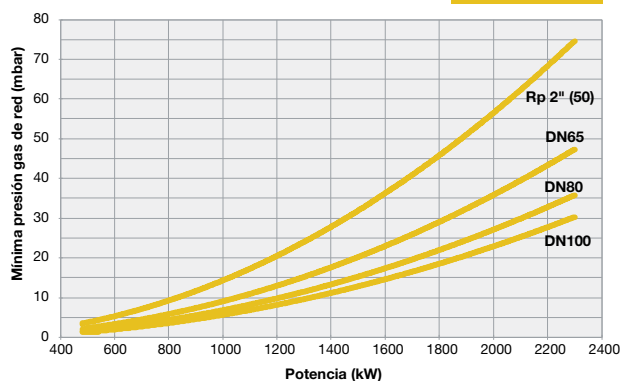


TP91A PR-MD

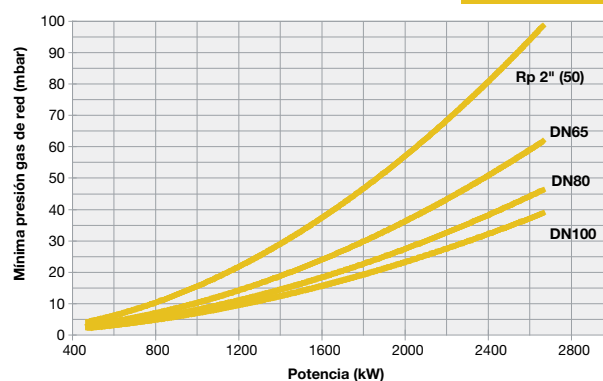


TP92A PR-MD

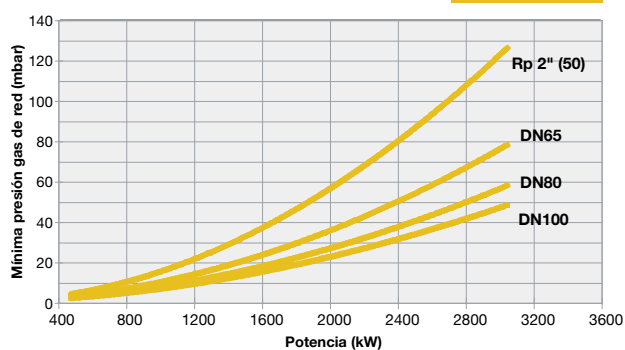


TP93A PR-MD

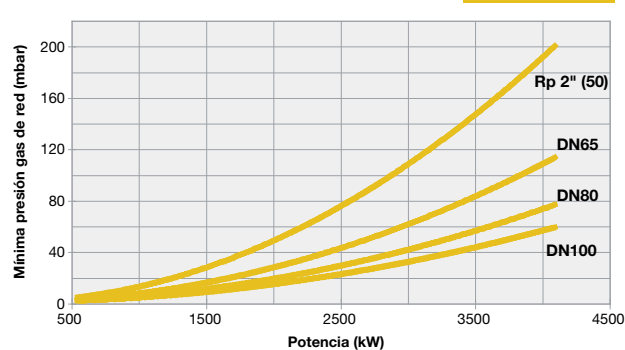


TP512A PR-MD

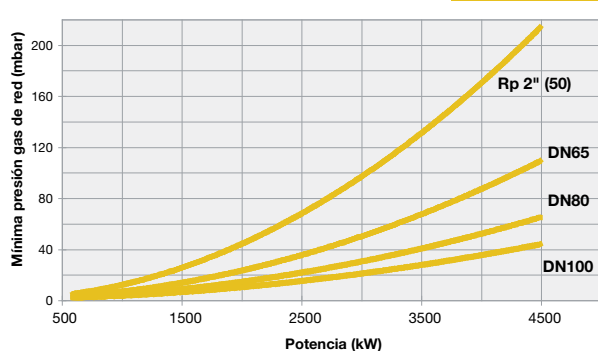


TP515A PR-MD

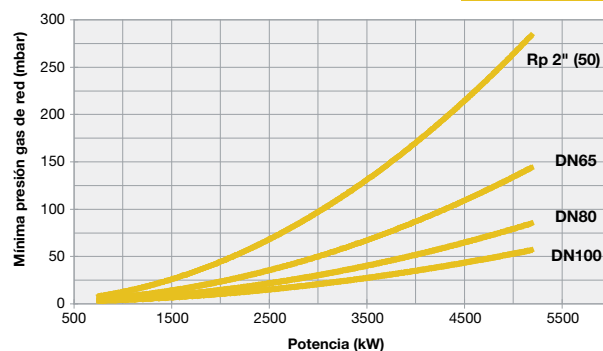


TP520A PR-MD

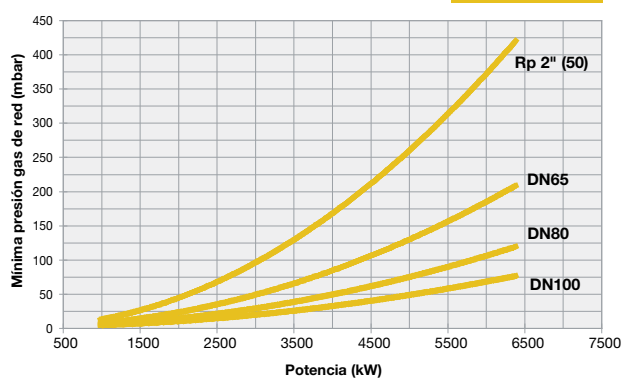


TP525A PR-MD

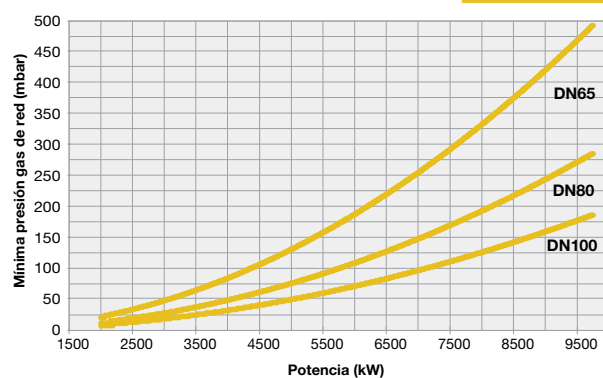


TP1030 PR-MD

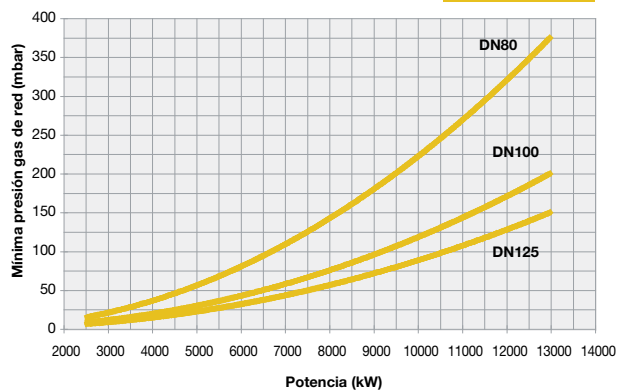


TP1050 PR-MD

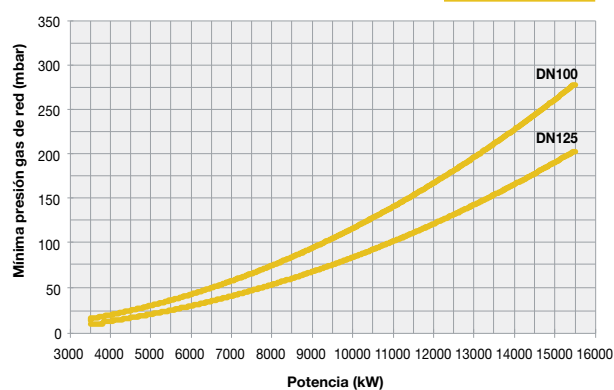


TP1080 PR-MD

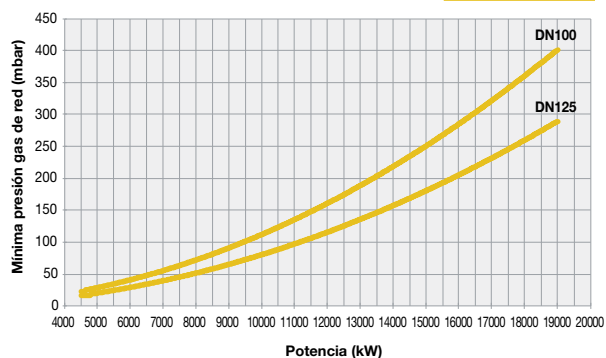


TP2000 PR-MD

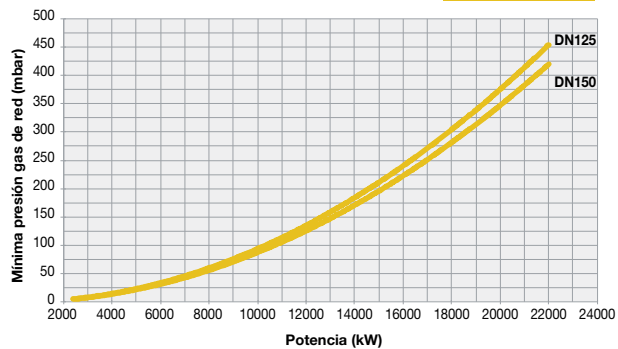

TP2500 PR-MD

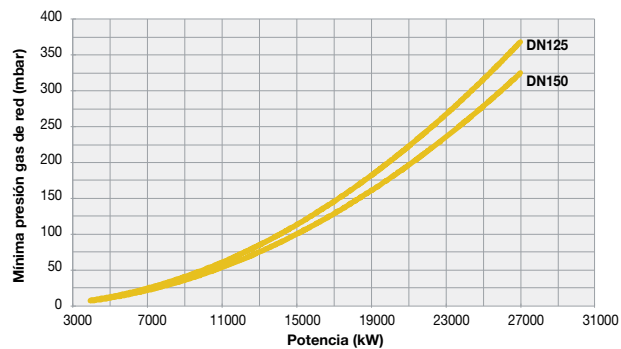

TP3000 PR-MD

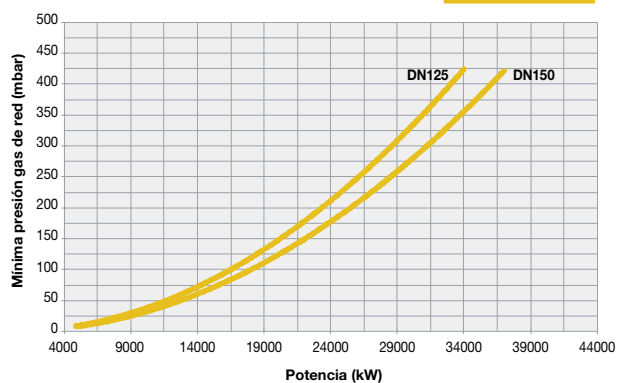

TP3000 PR-MD con válvulas neumáticas

