
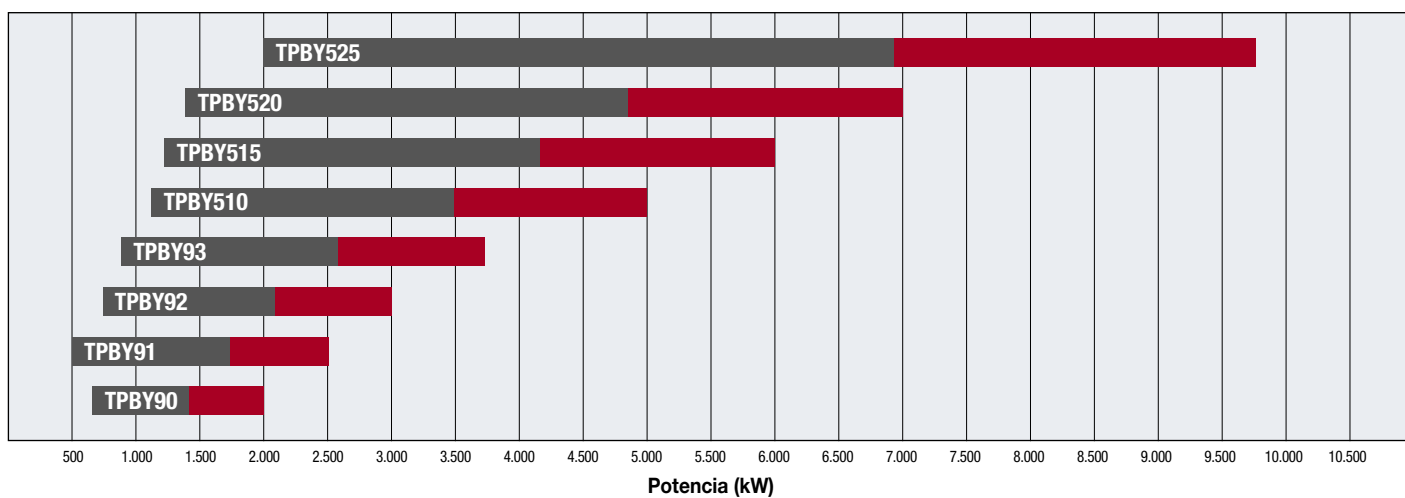
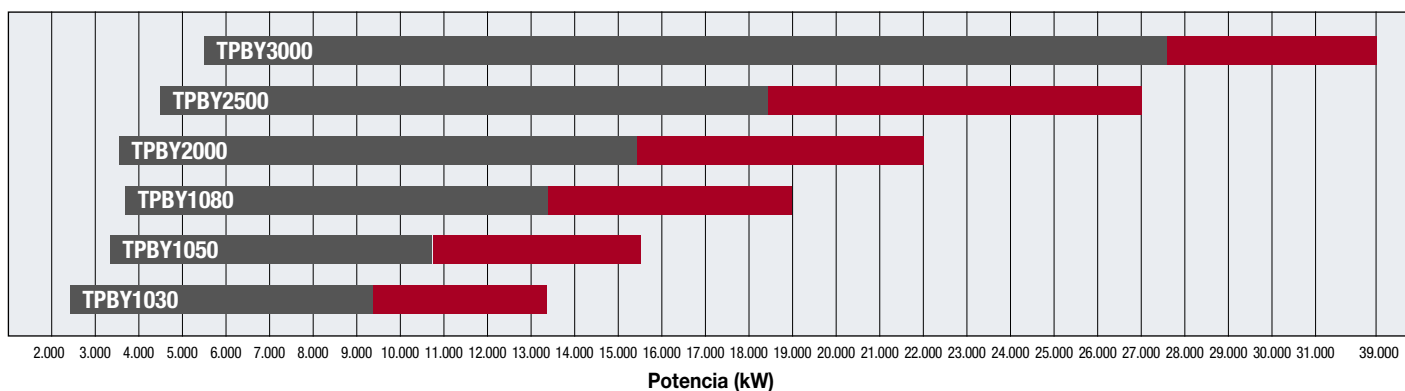


# TIPO **TPBY** TPBY90 ... TPBY3000

Con viscosidad hasta 4000 cSt a 50°C (530°E a 50°C) PULVERIZACION NEUMATICA

FUEL

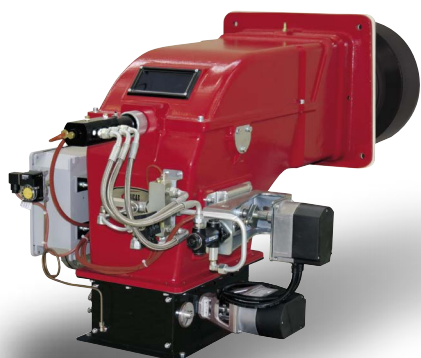

| Tipo     | Potencia mínima de modulación<br>kW | Potencia mínima de aplicación<br>kW | Potencia máxima<br>kW |
|----------|-------------------------------------|-------------------------------------|-----------------------|
| TPBY90   | 670                                 | 1.400                               | 2.000                 |
| TPBY91   | 500                                 | 1.750                               | 2.500                 |
| TPBY92   | 700                                 | 2.100                               | 3.000                 |
| TPBY93   | 900                                 | 2.590                               | 3.700                 |
| TPBY510  | 1.100                               | 3.500                               | 5.000                 |
| TPBY515  | 1.200                               | 4.200                               | 6.000                 |
| TPBY520  | 1.400                               | 4.900                               | 7.000                 |
| TPBY525  | 2.000                               | 6.825                               | 9.750                 |
| TPBY1030 | 2.550                               | 9.310                               | 13.300                |
| TPBY1050 | 3.100                               | 10.850                              | 15.500                |
| TPBY1080 | 3.800                               | 13.300                              | 19.000                |
| TPBY2000 | 3.600                               | 15.400                              | 22.000                |
| TPBY2500 | 4.500                               | 18.400                              | 27.000                |
| TPBY3000 | 5.500                               | 27.300                              | 39.000                |

## CARACTERÍSTICAS TÉCNICAS

| Tipo     | Modelo          | Potencia kW |        | Motor de la<br>bomba<br>kW | Resistencias<br>fuel<br>kW | Alimentación<br>eléctrica<br>monofásica<br>auxiliares | Alimentación<br>eléctrica<br>trifásica<br>motor |
|----------|-----------------|-------------|--------|----------------------------|----------------------------|-------------------------------------------------------|-------------------------------------------------|
|          |                 | min.        | max.   |                            |                            |                                                       |                                                 |
| TPBY90   | H-.xx.S.xx.G.xx | 670         | 2.000  | 0,75                       | 8                          | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY91   | H-.xx.S.xx.G.xx | 500         | 2.500  | 0,75                       | 8                          | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY92   | H-.xx.S.xx.G.xx | 700         | 3.000  | 0,75                       | 12                         | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY93   | H-.xx.S.xx.G.xx | 900         | 3.700  | 0,75                       | 12                         | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY510  | H-.xx.S.xx.G.xx | 1.100       | 5.000  | 0,75                       | 18                         | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY515  | H-.xx.S.xx.G.xx | 1.200       | 6.000  | 0,75                       | 18                         | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY520  | H-.xx.S.xx.G.xx | 1.400       | 7.000  | 0,75                       | 24                         | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY525  | H-.xx.S.xx.G.xx | 2.000       | 9.750  | 1,1                        | 24                         | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY1030 | H-.xx.S.xx.G.xx | 2.550       | 13.300 | 1,1                        | 24 + 24                    | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY1050 | H-.xx.S.xx.G.xx | 3.100       | 15.500 | 1,1                        | 24 + 24                    | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY1080 | H-.xx.S.xx.G.xx | 3.800       | 19.000 | 1,5                        | 24 + 24                    | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY2000 | H-.xx.S.xx.G.xx | 3.600       | 22.000 | 5,5                        | BAJO DEMANDA               | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY2500 | H-.xx.S.xx.G.xx | 4.500       | 27.000 | 5,5                        | BAJO DEMANDA               | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |
| TPBY3000 | H-.xx.S.xx.G.xx | 5.500       | 39.000 | 5,5                        | BAJO DEMANDA               | 230 V 1N AC 50 Hz                                     | 400 V 3 AC 50 Hz                                |