


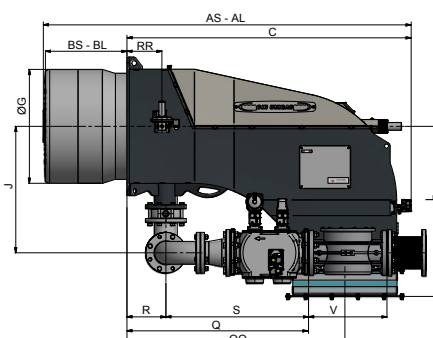



DIMENSIONI DI INGOMBRO (HTLX... - HTLX...FGR)



Foratura caldaia consigliata



Flangia bruciatore



Flangia ingresso aria

Tipo	DN	Dimensioni di ingombro (mm)																												
		AS	AL	BS	BL	C	D	E	F	G	H	J	JJ	K	KK	L	M	N	O	OO	P	Q	R	RR	S	U	V	W	Y	Z
HTLX2020	100	2465	2615	500	650	1875	1847	1339	507	545	700	775	160	850	882	1468	M16	1117	395	1337	790	970	239	215	731	1195	353	1468	635	425
HTLX2020	125	2465	2615	500	650	1875	1847	1339	507	545	700	775	160	850	882	1468	M16	1117	395	1337	790	970	239	215	731	1195	481	1468	635	425
HTLX2030	100	2456	2606	500	650	1875	1847	1339	507	659	717	775	160	850	882	1468	M16	1117	395	1337	790	970	239	215	731	1195	353	1468	-	425
HTLX2030	125	2456	2606	500	650	1875	1847	1339	507	659	717	775	160	850	882	1468	M16	1117	395	1337	790	970	239	215	731	1195	481	1468	-	425
HTLX2040	125	2456	2606	500	650	1875	1847	1373	473	698	760	775	160	850	882	1468	M16	1117	395	1337	790	970	239	215	731	1195	481	1468	651	425
HTLX2040	150	2456	2606	500	650	1875	1847	1373	473	698	760	775	160	850	882	1468	M16	1117	395	1337	790	1114	239	215	875	1195	-	1468	651	425