





DIMENSIONES TOTALES

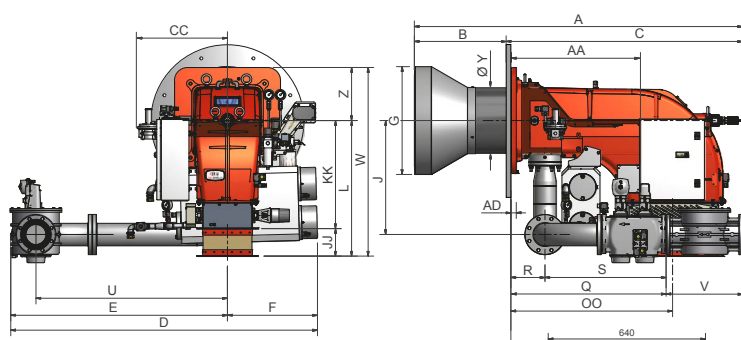


Taladrado caldera aconsejado



Brida de entrada de aire



Contrabrida



Brida del quemador

Tipo	DN	Dimensiones totales (mm)																											
		A	AA	AD	B	C	CC	D	E	F	G	H	J	JJ	K	KK	L	M	O	OO	Q	R	S	U	V	W	Y	Z	
KTPBY1030	80	2009	848	30	571	1438	556	1816	1219	520	600	731	709	175	660	672	845	M16	460	1000	937	204	733	1092	310	1175	372	329	
KTPBY1030	100	2009	848	30	571	1438	556	1816	1219	520	600	731	709	175	660	672	845	M16	460	1000	937	204	733	1092	350	1175	372	329	
KTPBY1050	80	2009	848	30	571	1438	556	1816	1219	520	600	731	709	175	660	672	845	M16	460	1000	937	204	733	1092	310	1175	408	329	
KTPBY1050	100	2009	848	30	571	1438	556	1816	1219	520	600	731	709	175	660	672	845	M16	460	1000	937	204	733	1092	350	1175	408	329	
KTPBY1080	100	2042	848	30	604	1438	556	1909	1349	560	671	731	709	175	660	672	845	M16	460	1000	937	204	733	1192	350	1175	417	329	
KTPBY1080	125	2042	848	30	604	1438	556	1909	1349	560	671	731	709	175	660	672	845	M16	460	1000	937	204	733	1192	478	1175	417	329	