
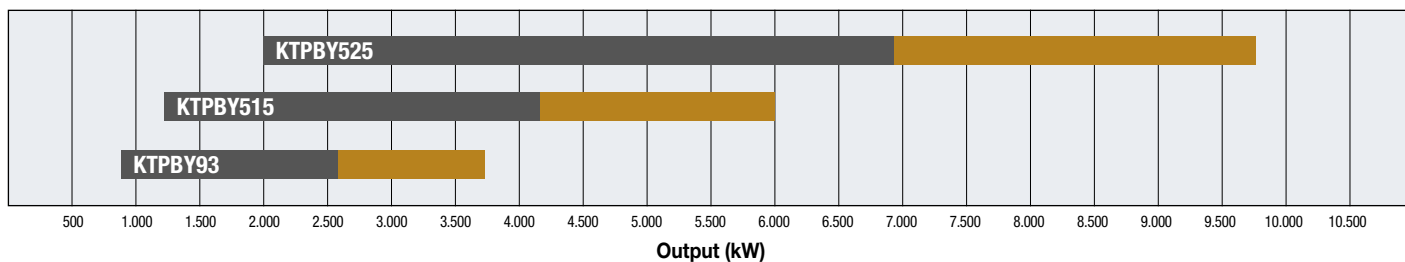


KTPBY... VS TYPE KTPBY93 ... KTPBY1080

GAS/HEAVY OIL

with viscosity up to 4000 cSt at 50°C (530°E at 50°C) - PNEUMATIC ATOMIZATION

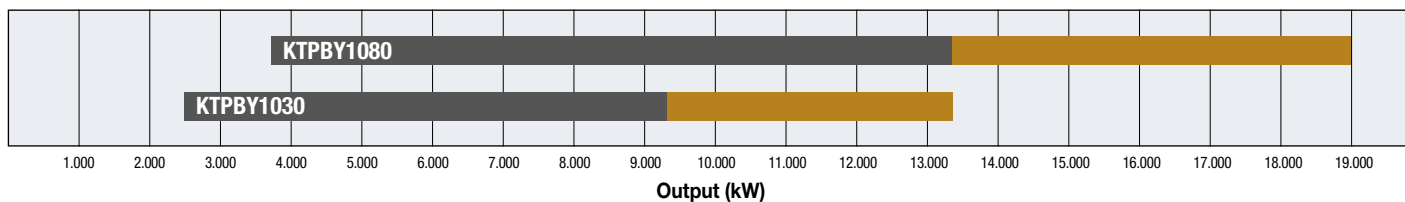

Type	Min. modulation output kW	Min. application output kW	Max output kW
KTPBY93	550	2.870	4.100
KTPBY515	770	3.640	5.200
KTPBY525	2.000	6.825	9.750
KTPBY1030	2.500	9.310	13.300
KTPBY1080	3.500	13.300	19.000

TECHNICAL DETAILS


Type	Model	Power kW		Pump motor	Resistor	Auxiliary electrical power supply	Motor electrical power supply	Gas connections	
		min.	max.	kW	kW			Rp	
KTPBY93	MH.xx.S.xx.x.x.xxx.xx	550	4.100	0,75	18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100	
KTPBY515	MH.xx.S.xx.x.x.xxx.xx	770	5.200	0,75	18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	2" - DN65 - DN80 - DN100	
KTPBY525	MH.xx.S.xx.x.x.xxx.xx	2.000	9.750	0,75	24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN65 - DN80 - DN100	
KTPBY1030	MH.xx.S.xx.x.x.xxx.xx	2.500	13.300	1,1	18+18	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN80 - DN100 - DN125	
KTPBY1080	MH.xx.S.xx.x.x.xxx.xx	3.500	19.000	2,2	24+24	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	DN100 - DN125	

KTPBY... VS TYPE KTPBY93 ... KTPBY1080


GAS/HEAVY OIL

with viscosity up to 4000 cSt at 50°C (530°E at 50°C) - PNEUMATIC ATOMIZATION


KTPBY93 VS PR-MD

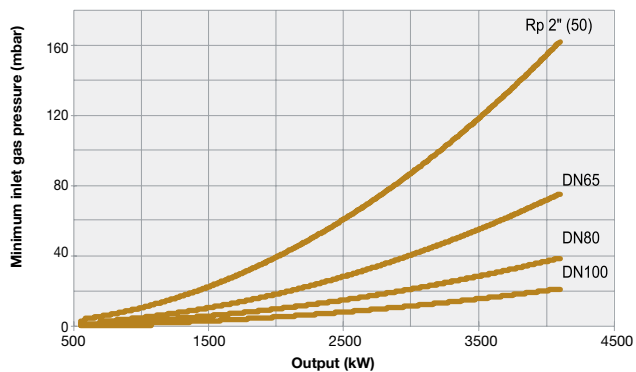


KTPBY515 VS PR-MD

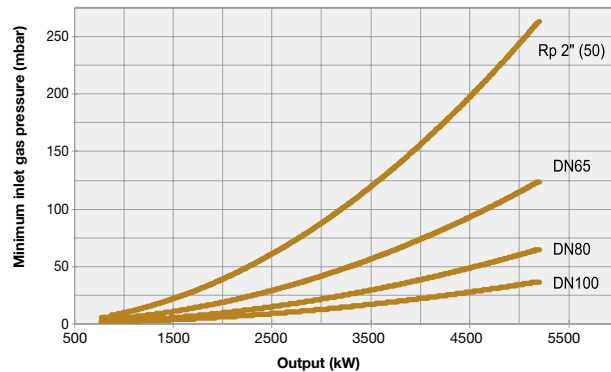

KTPBY525 VS PR-MD

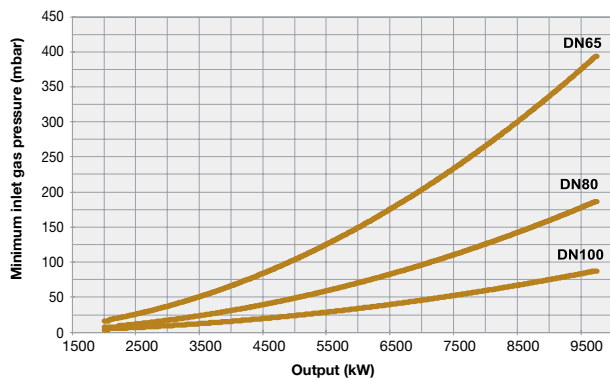

KTPBY1030 VS PR-MD

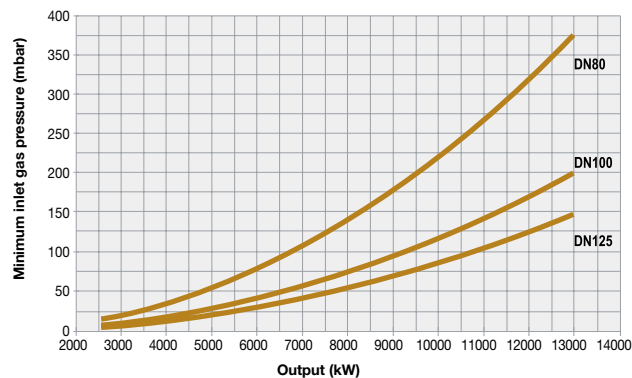

KTPBY1080 VS PR-MD

