

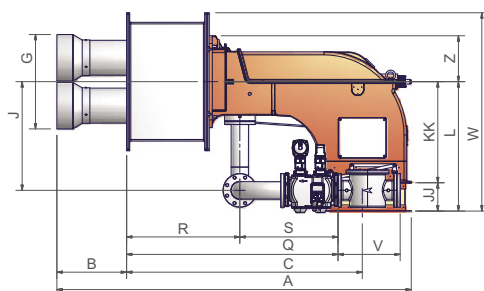


OVERALL DIMENSIONS



Boiler recommended drilling template






Diagram of a burner flange with a dimension line indicating a length of 100 mm.



Air inlet flange


Type	DN	Overall dimensions (mm)																												
		A	B	C	D	E	F	FF	G	GG	H	HH	J	JJ	K	KK	L	LL	M	MM	NN	O	P	Q	R	S	U	V	W	Z
KTPBY93	50	1361	304	1122	1342	852	490	255	386	255	442	221	449	185	550	510	695	510	M12	510	255	510	510	778	404	374	624	216	825	180
KTPBY93	65	1361	304	1122	1447	957	490	255	386	255	442	221	447	185	550	510	695	510	M12	510	255	510	510	887	404	403	750	293	840	180
KTPBY93	80	1361	304	1122	1449	959	490	255	386	255	442	221	447	185	550	510	695	510	M12	510	255	510	510	939	404	444	750	322	854	180
KTPBY93	100	1361	304	1122	1539	1049	490	255	386	255	442	221	447	185	550	510	695	510	M12	510	255	510	510	1046	404	524	824	382	867	180

OVERALL DIMENSIONS

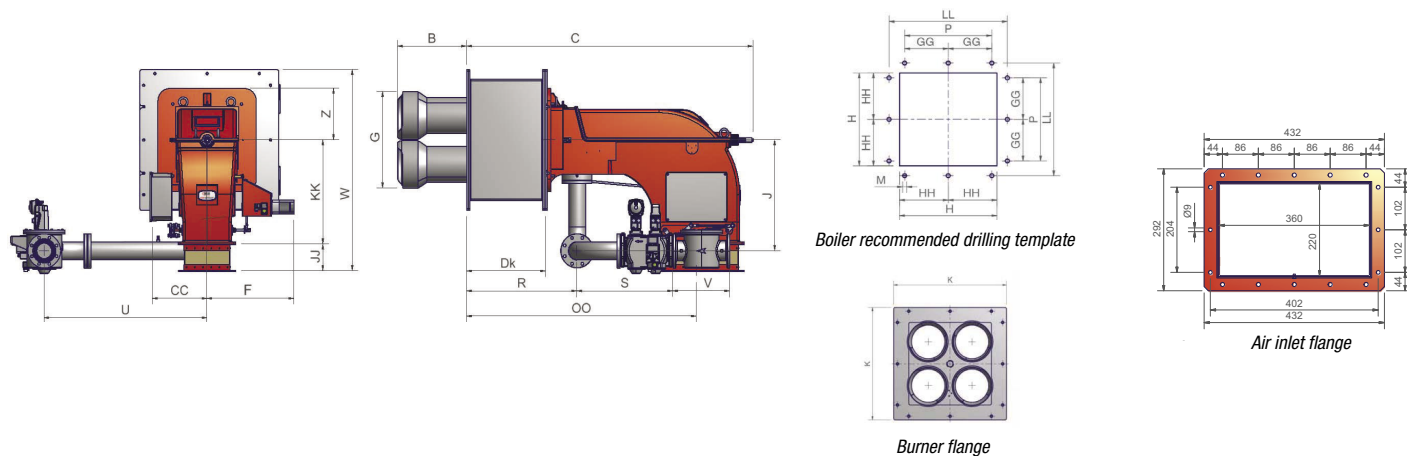

Type	DN	Overall dimensions (mm)																									
		B	C	CC	D	Dk	E	F	GG	H	HH	J	JJ	K	KK	L	LL	M	OO	P	R	S	U	V	W	Z	
KTPBY515	50	-	1287	-	1613	310	1071	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	605	843	216	970	235	
KTPBY515	65	-	1287	-	1591	310	1049	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	484	843	292	970	235	
KTPBY515	80	-	1287	-	1626	310	1084	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	535	875	313	970	235	
KTPBY515	100	-	1287	-	1709	310	1167	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	642	942	353	970	235	
KTPBY525	65	478	1287	-	1591	310	1049	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	484	843	292	970	235	
KTPBY525	80	478	1287	-	1626	310	1084	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	535	875	313	970	235	
KTPBY525	100	478	1287	-	1709	310	1167	542	275	-	300	494	175	750	532	707	700	M16	693	550	470	642	942	353	970	235	

OVERALL DIMENSIONS

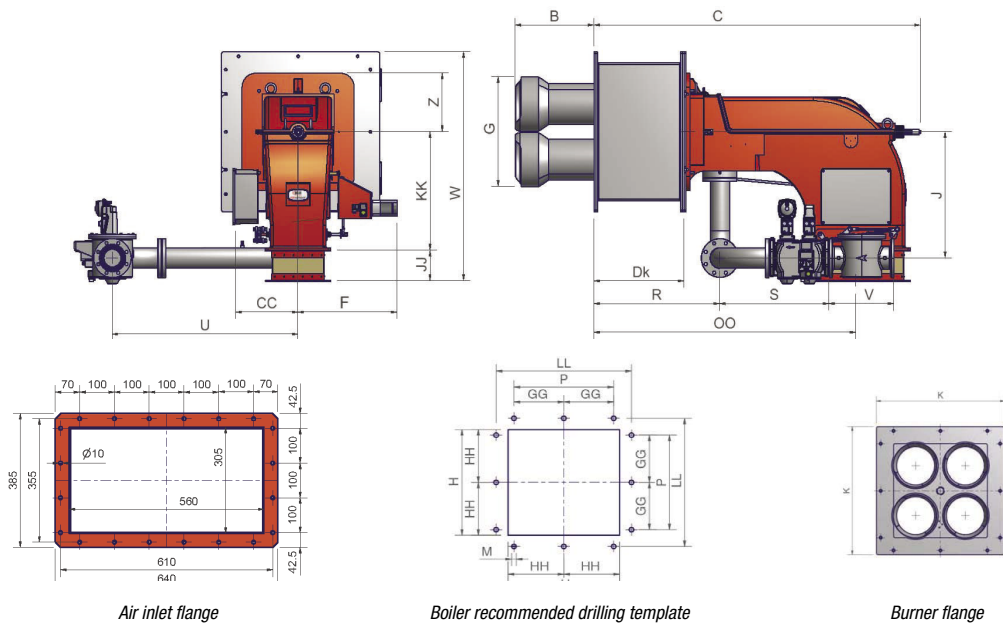

Air inlet flange

Boiler recommended drilling template

Burner flange

Type	DN	Overall dimensions (mm)																							
		B	C		CC	Dk	F	G	GG	H	HH	J	JJ	K	KK	LL	M	OO	P	R	S	U	V	W	Z
			min.	max.																					
KTPBY1030	80	435	1660	1961	348÷383	340	450÷670	560	275	600	300	710	175	750	665	700	16	1000	550	200	736	1092	322	1170	330
KTPBY1030	100	435	1660	1961	348÷383	340	450÷670	560	275	600	300	710	175	750	665	700	16	1000	550	200	642	1092	382	1170	330
KTPBY1030	125	435	1660	1961	348÷383	340	450÷670	560	275	600	300	710	175	750	665	700	16	1000	550	200	754	1192	480	1170	330
KTPBY1080	100	422	1860	2161	348÷383	540	450÷670	700	350	750	375	710	175	900	665	850	16	1000	700	200	642	1092	382	1170	330
KTPBY1080	125	422	1860	2161	348÷383	540	450÷670	700	350	750	375	710	175	900	665	850	16	1000	700	200	754	1192	480	1170	330