
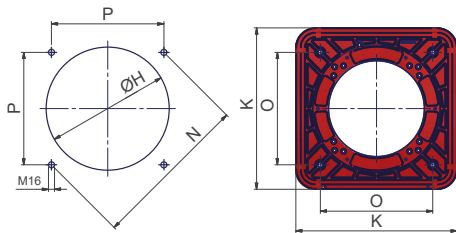


## TECHNICAL DETAILS

Type	Model	Output kW		Auxiliary electrical power supply	Motor electrical power supply	Fan motor kW	Gas connections	Noise level dBA
		min.	max.					
<b>N1060A</b>	M-.xx.SR.xx.A.1.xxx	1.200	10.600	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	22,0	DN80 - DN100 - DN125	< 85,6
<b>N1300A</b>	M-.xx.SR.xx.A.1.xxx	2.000	13.000	230 V 1N AC 50 Hz	400 V 3 AC 50 Hz	30,0	DN80 - DN100 - DN125	< 85,6

For the configuration of the gas train, see page 112-113.

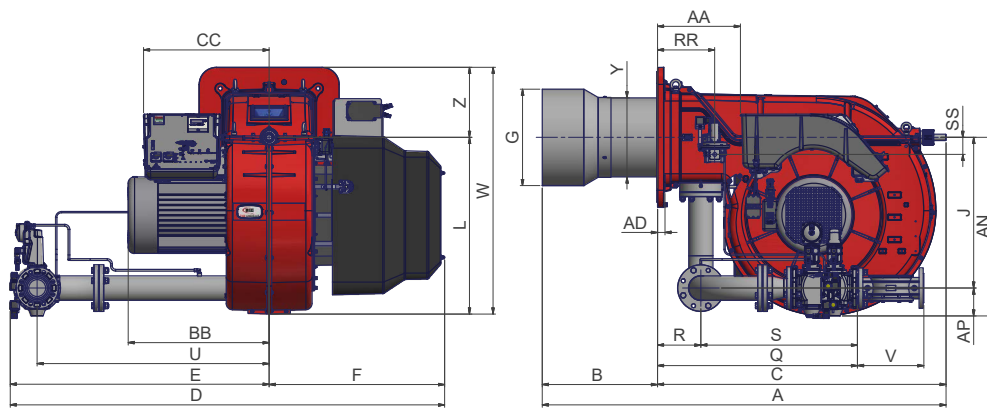

Suggested boiler drilling

Burner flange

Type	Packaging dimensions (mm)			
	l	p	h	kg
<b>N1060A</b>	2300	1720	1410	550
<b>N1300A</b>	2300	1720	1410	600

Approximate values (regarding model with gas train DN100)

Type	Model	Overall dimensions (mm)																													
		AA	A	AD	AN	AP	B	BB	C	CC	D	E	F	G	H	J	K	L	M	N	O	P	Q	R	S	U	V	W	Y	Z	
		min. max.																													
<b>N1060A</b>	M-.xx.SR.xx.A.1.80	384	1900	35	841	132	542	664	1358	684	1842	1219	623	454	504	709	660	831	M16	651	460	460	460	944	204	740	1092	310	1161	399	330
<b>N1060A</b>	M-.xx.SR.xx.A.1.100	384	1900	35	854	145	542	664	1358	684	1858	1235	623	454	504	709	660	831	M16	651	460	460	460	848	204	644	1092	350	1161	399	330
<b>N1060A</b>	M-.xx.SR.xx.A.1.125	384	1900	35	884	175	542	664	1358	684	1972	1349	623	454	504	709	660	831	M16	651	460	460	460	958	204	754	1192	478	1161	399	330
<b>N1300A</b>	M-.xx.SR.xx.A.1.80	390	1908	35	841	132	542	664	1366	684	1842	1219	623	514	564	709	660	831	M16	651	460	460	460	944	204	740	1092	310	1161	399	330
<b>N1300A</b>	M-.xx.SR.xx.A.1.100	390	1908	35	854	145	542	664	1366	684	1858	1235	623	514	564	709	660	831	M16	651	460	460	460	848	204	644	1092	350	1161	399	330
<b>N1300A</b>	M-.xx.SR.xx.A.1.125	390	1908	35	884	175	542	664	1366	684	1972	1349	623	514	564	709	660	831	M16	651	460	460	460	958	204	754	1192	478	1161	399	330

Approximate values